

ComColor GL Series

Optional Accessories Specifications

Scanner HS7000

| | | |
|---|---|---|
| Type | Flat Bed Scanner with Automatic Document Feeder (ADF) | |
| Scanning Modes | Copy mode: Color, Monochrome, Auto, Cyan, Magenta Scan mode: Color, Monochrome, Auto, Grayscale | |
| Scanning Resolution | 600 dpi, 400 dpi, 300 dpi, or 200 dpi | |
| Maximum Scanning Area | 303 mm × 432 mm (11 15/16" × 17") (when using platen glass) 295 mm × 430 mm (11 5/8" × 16 15/16") (when using ADF) | |
| Copy | Writing Resolution | Standard: 300 dpi × 300 dpi Fine: 300 dpi × 600 dpi |
| | Copy Paper Size | Maximum: 303 mm × 432 mm (11 15/16" × 17") (equivalent to A3) |
| | First Copy Time | Monochrome/Color: 7 sec. or less (when copying A4/Letter long-edge feed orientation using Color Priority Mode) |
| | Copying Speed | Simplex copying (A4/Letter long-edge feed, using ADF): 80 ppm or higher Duplex copying (A4/Letter long-edge feed, using ADF): 80 ppm or higher |
| Auto Document Feeder | Reproduction Size | 50% to 200% (Copy mode) 50% to 200% (Scanner mode, resolution: 200/300 dpi), only 100% (Scanner mode, resolution: 400/600 dpi) |
| | Type | Original source displacement (capable of scanning both sides of a document by simultaneous duplex scanning) |
| | Original Size | Maximum: 297 mm × 432 mm (11 11/16" × 17") (equivalent to A3) Minimum: 100 mm × 148 mm (3 15/16" × 5 27/32") |
| | Paper Weight | 52 gsm to 128 gsm (14-lb bond to 34-lb bond) |
| Scan | Original Capacity | Max. 200 sheets: 80 gsm (21-lb bond) Height up to 25 mm (1") |
| | Scanning Gray Levels | 10-bit input and 8-bit output for each RGB color |
| | Scanning Speed | Monochrome/Color: 100 ppm *RISO KAGAKU standard original (A4/Letter long-edge feed), 300 dpi, JPEG, PDF, when stored to main unit hard drive |
| | Network Interface*1 | Ethernet 1000BASE-T/100BASE-TX/10BASE-T |
| | Data-saving Method*1 | Save to main unit hard drive, server, or USB flash drive, or send by e-mail |
| Data-saving Format*1 | Monochrome: TIFF, PDF, PDF/A Grayscale/Full Color: TIFF, JPEG, PDF, PDF/A | |
| Power Source | AC 100 V - 240 V, 1.2 A - 0.6 A, 50 Hz - 60 Hz | |
| Power Consumption | Max. 100 W | |
| Dimensions (W × D × H) | 640 mm × 560 mm × 255 mm (25 3/16" × 22 1/16" × 10 1/32") | |
| Required Space with Printer (W × D × H) | 1,235 mm × 1,345 mm × 1,635 mm (48 5/8" × 52 15/16" × 64 3/8") | |
| Weight | Approx. 25 kg (55 lb) | |

*1 Via the internal host controller

Face Down Finisher G10

| | | |
|---|---|---|
| Type | External Unit | |
| Finishing Functions | Offset stacking, staple | |
| Paper Size | Without offset | Maximum: 340 mm × 550 mm (13 3/8" × 21 5/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 27/32") |
| | Offset output | Regular-sized paper width: 182 mm × 257 mm - 297 mm × 431.8 mm (7 3/16" × 10 1/8" - 11 11/16" × 17") Irregular-sized paper width: 131 mm × 148 mm - 305 mm × 550 mm (5 3/16" × 5 27/32" - 12" × 21 5/8") |
| Paper Weight | 46 gsm to 210 gsm (12-lb bond to 56-lb bond) | |
| Tray Capacity | Height up to 108 mm (4 1/4") | |
| Maximum Number of Staples | 50 sheets* A4, A4 long-edge feed, B5(JIS), B5(JIS)-long edge feed, Letter, Letter long-edge feed 25 sheets* A3, B4(JIS), Ledger, Legal, Foolscap *When using plain paper and recycled paper (85 gsm (23-lb bond)) | |
| Paper Size for Staple | A3, B4(JIS), A4, A4-long-edge feed, B5(JIS), B5(JIS)-long-edge feed, Ledger, Legal, Letter, Letter-long-edge feed, Foolscap | |
| Paper Weight for Staple | 52 gsm to 210 gsm (14-lb bond to 56-lb bond) (plain paper, recycled paper) | |
| Staple Position | 1 at front side (angle stapling) 1 at rear side (angle stapling) 2 at center (parallel stapling) | |
| Power Source | AC 100 V - 240 V, 1.2 A - 0.6 A, 50 Hz - 60 Hz | |
| Power Consumption | Max. 110 W | |
| Dimensions (W × D × H) | 760 mm × 680 mm × 585 mm (29 15/16" × 26 25/32" × 23 1/32") | |
| Required Space with Printer (W × D × H) | 1,440 mm × 1,240 mm × 1,345 mm (56 11/16" × 48 13/16" × 52 15/16") | |
| Weight | Approx. 30 kg (66 lb) | |

Face Down Finisher Consumables

ComColor Staple 50

Staples for the Face Down Finisher G10.
15,000 Pieces/Box.



Additional 2000 Sheet Feeder FG20

| | | |
|---|--|--|
| Type | External Paper Tray Unit | |
| Paper Size | A4 long-edge feed, B5(JIS) long-edge feed, Letter long-edge feed, 16K long-edge feed | |
| Paper Type and Weight | 52 gsm to 104 gsm (14-lb bond to 28-lb bond) (plain paper, recycled paper) | |
| Tray Capacity | Height up to 220 mm(8 21/32")*1 | |
| Power Source | Power supplied from the main unit | |
| Dimensions (W × D × H) | 415 mm × 600 mm × 390 mm (16 11/32" × 23 5/8" × 15 11/32") | |
| Required Space with Printer (W × D × H) | 1,480 mm × 1,240 mm × 1,160 mm (58 9/32" × 48 13/16" × 45 21/32") | |
| Weight | Approx. 29 kg (64 lb) | |

*1 When using plain paper and recycled paper (85 g/m2 (23-lb bond))

Multifunction Finisher FG20

| | | |
|---|---|--|
| Type | External Unit | |
| Tray Type | Top tray, Stacking tray, Booklet tray | |
| Finishing Functions | Offset output, Staple, Punch, Booklet binding, Bi-fold | |
| Paper Size | Top Tray | Maximum: 330 mm × 488 mm (13" × 19 7/32") Minimum: 100 mm × 148 mm (3 15/16" × 5 27/32") |
| | Stacking Tray | Maximum: 330 mm × 488 mm (13" × 19 7/32") Minimum: 148 mm × 148 mm (5 27/32" × 5 27/32") |
| | Booklet Tray | Maximum: 330 mm × 488 mm (13" × 19 7/32") Minimum: 182 mm × 257 mm (7 3/16" × 10 1/8") |
| Paper Weight | Top Tray / Stacking Tray | 52 gsm to 210 gsm (14-lb bond to 56-lb bond) |
| | Booklet Tray | 60 gsm to 90 gsm (16-lb bond to 24-lb bond) (cover: 90gsm to 210 gsm (24-lb bond to 56-lb bond)) |
| Tray Capacity | Top Tray | Height up to 50 mm (1 31/32") |
| | Stacking Tray | Height up to 200 mm (7 7/8") |
| | Booklet Tray | 20 copies (15 sheets for a copy) |
| Stapling | Maximum Number of Staples*1 | 100 sheets A4, A4 long-edge feed, B5(JIS) long-edge feed, Letter, Letter long-edge feed 65 sheets A3, B4(JIS), Ledger, Legal, Foolscap |
| | Paper Size | Maximum: 297 mm × 432 mm (11 11/16" × 17") (equivalent to A3) Minimum: 182 mm × 148 mm (7 5/32" × 5 27/32") |
| | Staple Position | 1 at front side (angle stapling), 1 at rear side (angle stapling ² , parallel stapling), 2 at center (parallel stapling) |
| Punching | Number of Punches | 2 holes, 3 holes 2 holes, 4 holes |
| | Paper Size | 2 holes: A3, B4 (JIS), A4-long-edge feed, A4, B5 (JIS)-long-edge feed, Ledger, Legal, Letter-long-edge feed, Letter 3 holes: A3, B4 (JIS), A4-long-edge feed, B5 (JIS)-long-edge feed, Ledger, Letter-long-edge feed 4 holes: A3, A4-long-edge feed, Ledger, Letter-long-edge feed |
| | Paper Weight | 52 gsm to 210 gsm (14-lb bond to 56-lb bond) |
| Creating a Booklet (Center margin/2-fold) | Maximum Number of Sheets*1*3 | Center margin: 20 sheets (80 pages) 2-fold: 5 sheets (20 pages) |
| Power Source | AC 100-240 V, 50-60 Hz, 2.3-1.1 A (3.0-1.5 A with Folder Unit) | |
| Power Consumption | Max. 230 W (300 W with Folder Unit) | |
| Operating Noise | 68 dB (A) or less | |
| Dimensions (W × D × H) | 1,205 mm × 735 mm × 1,215 mm (47 7/16" × 28 15/16" × 47 27/32") | |
| Required Space with Printer (W × D × H) | With folder unit | 2,655 mm × 1,325 mm × 1,215 mm (104 17/32" × 52 5/32" × 47 27/32") |
| | Without folder unit | 2,415 mm × 1,325 mm × 1,215 mm (95 3/32" × 52 5/32" × 47 27/32") |
| Weight | Approx. 146 kg (322 lb) | |

*1 When using plain paper or recycled paper (85 gsm (23-lb bond))

*2 Rear-side angle stapling is only available for A4 long-edge feed and A3.

*3 Includes an added cover.

Folder Unit FG 20

| | | |
|---------------------------------|--|---------------------|
| Paper Size | Z-fold*1 | A3, B4(JIS), Ledger |
| | Tri-fold (Outer Tri-fold/Inner Tri-fold) | A4, Letter |
| Paper Weight | 60gsm to 90gsm (16-lb bond to 24-lb bond) (plain paper, recycled paper) | |
| Tri-fold Output Tray Capacity*2 | Approx. 30 sheets | |
| Number of Sheet per Fold | 1 sheet | |
| Dimensions (W × D × H) | 235 mm × 735 mm × 1,005 mm (9 1/4" × 28 15/16" × 39 9/16") | |
| Weight | Approx. 52 kg (115 lb) | |

*1 When printouts are output to the stacking tray, maximum height up pages differ according to the paper size.
(A3/Ledger paper: 80 sheets, B4(JIS) paper: 60 sheets)

*2 When using plain paper or recycled paper (85 gsm(23-lb bond))

Multifunction Finisher Consumables

ComColor Staple 100

Staples for the Multifunction Finisher FG20.
5,000 Pieces x4 /Box (4 staple cartridges/1 staple dust box).

ComColor Staple Booklet

Saddle stitch staples for the Multifunction Finisher FG20.
5,000 Pieces x2/Box (2 staple cartridges).

High Capacity Feeder G10

| | |
|---|---|
| Type | External Unit |
| Paper Size | Maximum: 340 mm × 465 mm (13 3/8" × 18 5/16") Minimum: 90 mm × 148 mm (3 9/16" × 5 27/32") |
| Paper Type and Weight | 46 gsm to 210 gsm (12-lb bond to 56-lb bond) (plain paper, recycled paper, envelopes, postcards) |
| Tray Capacity | Height up to 440 mm (17 5/16") |
| Power Source | AC 100 V - 240 V, 1.0 A - 0.5 A, 50 Hz - 60 Hz |
| Power Consumption | Max. 100 W Ready ^{*1} : 30 W or less Sleep ^{*2} : 30 W or less Stand-by: 0.5 W or less |
| Operating Noise | Max. 68 dB (A) A4-long-edge feed (Simplex) at the maximum print speed |
| Dimensions (W × D × H) | 790 mm × 630 mm × 740 mm (31 3/32" × 24 13/16" × 29 1/8") |
| Required Space with Printer (W × D × H) | 1,565 mm × 1,240 mm × 1,160 mm (61 19/32" × 48 13/16" × 45 21/32") |
| Weight | Approx. 69 kg (152 lb) |

*1 Without printing operation

*2 When setting [Power Consumption (in Sleep)] to [Low].

High Capacity Stacker G10

| | |
|---|--|
| Type | External Unit |
| Finishing Functions | Collating, offset stacking |
| Paper Size | Maximum: 340 mm × 460 mm (13 3/8" × 18 1/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 27/32") Offset: 90 mm × 182 mm - 340 mm × 432 mm (3 9/16" × 7 3/16" - 13 3/8" × 17") (Envelopes are not acceptable.) |
| Paper Type and Weight | 46 gsm to 210 gsm (12-lb bond to 56-lb bond) (plain paper, recycled paper, postcards) |
| Tray Capacity | Collating: Height up to 440 mm (17 5/16") ^{*1} Offset: Height up to 405 mm (15 15/16") ^{*2} |
| Power Source | AC 100 V - 240 V, 1.4 A - 0.7 A, 50 Hz - 60 Hz |
| Power Consumption | Max. 140 W Ready ^{*3} : 30 W or less Sleep ^{*4} : 30 W or less Stand-by: 0.5 W or less |
| Operating Noise | 68 dB (A) or less A4 long-edge feed (Simplex) at the maximum print speed |
| Dimensions (W × D × H) | 1,000 mm × 700 mm × 960 mm (39 3/8" × 27 9/16" × 37 25/32") |
| Required Space with Printer (W × D × H) | 2,210 mm × 1,315 mm × 1,160 mm (87" × 51 3/4" × 45 21/32") |
| Weight | Approx. 135 kg (298 lb) |

*1 Height up to 110 mm for A5, postcards, envelopes, non-regular size paper

*2 Not applicable to A5, postcards, envelopes, non-regular size paper, etc.

*3 Without printing operation

*4 When setting [Power Consumption (in Sleep)] to [Low].

RISO Auto-Control Stacking Tray II

The paper guides automatically open to the correct width to match the paper in use.



Wide Stacking Tray



| Product Name | | RISO Auto-control Stacking Tray | Wide Stacking Tray |
|--|-----------------------------|---|--|
| Paper Size | | Maximum: 320 mm × 432 mm (12 9/16" × 17") Minimum: 90 mm × 148 mm (3 9/16" × 5 27/32") | Maximum: 340 mm × 550 mm (13 3/8" × 21 5/8") Minimum: 90 mm × 148 mm (3 9/16" × 5 27/32") |
| Tray Capacity ^{*1} | | 1,000 sheets | |
| Dimensions when connected to Printer (W × D × H) | In use | 1,745 mm × 725 mm × 1,160 mm (68 11/16" × 28 17/32" × 45 21/32") | 1,875 mm × 725 mm × 1,160 mm (73 13/16" × 28 17/32" × 45 21/32") |
| | In storage | 1,370 mm × 705 mm × 1,045 mm (53 29/32" × 27 3/4" × 41 1/8") | 1,320 mm × 705 mm × 1,015 mm (51 15/16" × 27 3/4" × 39 15/16") |
| | Required Space with Printer | 1,745 mm × 1,240 mm × 1,160 mm (68 11/16" × 48 13/16" × 45 21/32") | 1,875 mm × 1,240 mm × 1,160 mm (73 13/16" × 48 13/16" × 45 21/32") |
| Weight | | Approximately 8 kg (17 lb) | Approximately 5 kg (11 lb) |

*1 When using plain paper (85 gsm (23-lb bond)).

Perfect Binder G10

| | | |
|--|---|--|
| Type | Perfect Binder | |
| Finishing Type | Perfect Binding | |
| Warming-Up Time | 13 min. or less (at a room temperature of 23 °C) | |
| Binding speed ^{*1} | 62 booklets/hour | |
| Paper Size | Body page (long-edge feed): A4, B5(JIS), A5, Letter Cover sheet ^{*2} (When cutting off the surplus part): A5: 210 mm × 307 mm - 342 mm (8 9/32" × 12 3/32" - 13 15/32") B5: 257 mm × 374 mm - 409 mm (10 1/8" × 14 23/32" - 16 3/32") A4: 297 mm × 430 mm - 465 mm (11 11/16" × 16 15/16" - 18 5/16") Letter: 279.4 mm × 441.8 mm - 476.8 mm (11" × 17 13/32" - 18 25/32") Cover sheet (When leaving the surplus part): A5: 210 mm × 298.5 mm - 398 mm (8 9/32" × 11 3/4" - 15 21/32") B5: 257 mm × 365.5 mm - 432 mm (10 1/8" × 14 3/8" - 17") A4: 297 mm × 421.5 mm - 460 mm (11 11/16" × 16 19/32" - 18 1/8") Letter: 279.4 mm × 433.3 mm - 466 mm (11" × 17 1/16" - 18 11/32") | |
| Paper Weight | Standard Tray | Body page: Plain paper, recycled paper 52 gsm to 128 gsm (14-lb bond to 34-lb bond) (For A5 long-edge feed, 64 gsm to 128 gsm (17-lb bond to 34-lb bond)) Cover ^{*3} : Plain paper, recycled paper, high-quality paper 80 gsm to 210 gsm (21-lb bond to 56-lb bond) |
| | Feed Tray | Body page: Plain paper, recycled paper 52 gsm to 104 gsm (14-lb bond to 28-lb bond) (not available with A5 long-edge feed) Cover ^{*3} : Plain paper, recycled paper 80 gsm to 104 gsm (21-lb bond to 28-lb bond) |
| | Body Sheet Stacker | Body page: Plain paper, recycled paper 52 gsm to 128 gsm (14-lb bond to 34-lb bond) |
| | Cover Sheet Inserter | Cover ^{*3} : Plain paper, recycled paper, high-quality paper 80 gsm to 210 gsm (21-lb bond to 56-lb bond) |
| Binding Thickness (Binding Amount of Sheets) | | 1.5 mm - 30 mm (1/16" - 1 3/16") 15 - 300 sheets When using plain paper (85 gsm (23-lb bond)) Binding amount of sheets varies depending on the paper type. |
| Binding Side | | Long side only |
| Output Capacity ^{*4} | | 30 copies (Max. 50 sheets for a copy) |
| Essential margin ^{*5} | | Body page: Min. 5 mm (3/16") Cover: Whole back side of spine, min. 5 mm (7/32") on Cover 2 and Cover 3 |
| Power Source | | Perfect Binder G10 (120) AC 100 V - 120 V, 12.0 A, 50 Hz - 60 Hz Perfect Binder G10 (200) AC 220 V - 240 V, 6.0 A, 50 Hz - 60 Hz |
| Power Consumption | | Max. 1,500 W |
| Operating noise ^{*6} | | Max. 70 dB or less (when binding) |
| Dimensions (W × D × H) | | 1,290 mm × 675 mm × 1,125 mm (50 25/32" × 26 9/16" × 44 9/32") |
| Required Space with Printer (W × D × H) | | 2,755 mm × 1,240 mm × 1,160 mm (108 7/16" × 48 13/16" × 45 21/32") |
| Weight | | Approx. 220 kg (485 lb) |


*1 The per hour speed converted based on the time required for the 5th to 10th booklet to be completed when configured with the following: Type of paper - IJ paper; Concentration - standard; and Resolution - 300 dpi.

*2 The length of the cover will vary depending on the thickness of the body pages to be bound. Paper with shorter length than body pages cannot be used.

*3 If the thickness of the booklet (spine) will be 20 mm (25/32") or more, the use of paper that is 105 gsm (28-lb bond) or heavier is recommended.

*4 When using ideal IJ paper (85 gsm (23-lb bond))

*5 • Two-page spread on the body page • Two-page spread on the cover



*6 165 ppm when connected to the printer, binding A4 long-edge feed

Perfect Binder Consumables



Perfect Binder Glue sheet
1 roll/Box
Binds up approx. 600 booklets
(A4 size, 5 mm (7/32") width)



Perfect Binder Primary filter
6 Sheets/Box
Replace after using two sets of glue sheets.



Perfect Binder Secondary filter
1 Box
Replace after using twelve sets of glue sheets or after approximately one year. Replace at the timing of whichever comes first.

IC Card Reader Connection Kit

| | |
|-----------------------|--|
| Applicable Card | ISO 14443 TypeA/TypeB/TypeC (FeliCa/Mifare) ^{*1} |
| Radio Law Category | Guided read-write communication equipment |
| Power Source | Power supplied from the USB port |
| Operating Environment | Temperature: 15 to 30 (59 to 86) Humidity: 40% to 70% RH (non-condensing) |

*1 IC Card Reader and IC cards are required.

ComColorExpress FS2100C

| | |
|-----------------------------------|--|
| CPU | Intel® Core™ i3-8100 3.60GHz |
| Memory Capacity | 8 GB |
| Storage Capacity | Boot Drive 256GB SSD/Data Drive 500GB HDD |
| Operating System | Windows® 10 IoT Enterprise 2019 LTSC |
| Network Interface | 2 ports (Ethernet: 10BASE-T/100BASE-TX/1000BASE-T) |
| Power Source | AC 100 V - 240 V, 1.5 A - 1.0 A, 50 Hz - 60 Hz |
| Power Consumption | Max. 80W / Ready 30W |
| Dimensions (W × D × H)*1 | 204mm x 248mm x 384mm (8.0 x 9.75 x 15.1in.) |
| Weight | Approx. 6 kg |
| PDL (Page Description Language) | PostScript® 3 (CPSI:3020), PDF (1.3, 1.4, 1.5, 1.6, 1.7, 2.0), PDF/VT, EPS, FreeForm, Enhanced PCL6/PCL5, TIFF6.0, PPML3.0, Creo VPS, Fierly® JDF1.8 |
| Support Protocol | TCP/IP, AppleTalk, Bonjour, LPR, IPP, Port 9100, FTP, SMB, Email (iMAP/POP3), PAP, WSD, USB, HTTP, HTTPS (TLS), SNMP, LDAPv3, IPv4, IPv6, IPsec |
| Installed Font | PS: 140 fonts PCL: 81 fonts |
| Supported Client Operating System | Printer Driver: Windows 8.1 (32-bit/64-bit), Windows 10 (32-bit/64-bit), Windows Server® 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, macOS v10.14 (Mojave), v10.15 (Catalina), v11 (Big Sur) Command Work Station: Windows 10 (64-bit), Windows Server 2016 (64-bit), Windows Server 2019 (64-bit), macOS v10.14 (Mojave), v10.15 (Catalina), v11 (Big Sur) |

*1 Keep other objects at least 200 mm away from the equipment in the rear, and right and left.

ComColorExpress RS1200C

| | |
|---------------------------------|--|
| PDL (Page Description Language) | PostScript3 (CPSI:3019)*1, PDF (1.7), PCL 5c, PCL 6 (PCL XL), TIFF (6.0), PPML (2.1) |
| Applicable protocol | TCP/IP, HTTP, HTTPS(TLS1.2), DHCP, FTP, SMBv3, NetBIOS, LPR, IPP, Port 9100(RAW port), IPv4, IPv6, IPsec (IKEv1), SNMP |
| Installed Fonts | PS: 145 fonts PCL: 80 fonts |

*1 Genuine Adobe® engine.

PS Kit FG10


PS Kit supports a variety of operating systems, and PDF files can be printed directly from USB flash drives.

| | |
|---------------------------------|--|
| Type | RIP option |
| PDL (Page Description Language) | PostScript Level3 (CPSI:3019)*1 PDF (1.7) PCL 5c, PCL 6 (PCL XL) TIFF (6.0) |
| Supported Protocols | TCP/IP, HTTP, HTTPS, DHCP, ftp, lpr, IPP, SNMP, Port9100 (RAW port), IPv4, IPv6, IPsec |
| Installed Fonts | PS: 136 Roman fonts and 2 Japanese fonts PCL: 88 Roman fonts |


*1 Genuine Adobe engine.

ComColor GL Series and Optional Accessories Dimensions


ComColor GL

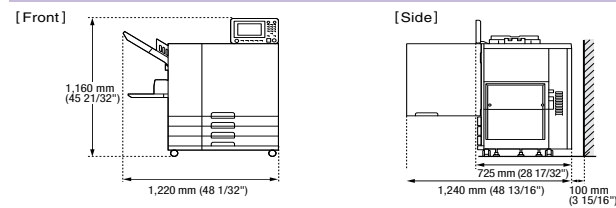


ComColor GL + High Capacity Feeder G10 + High Capacity Stacker G10

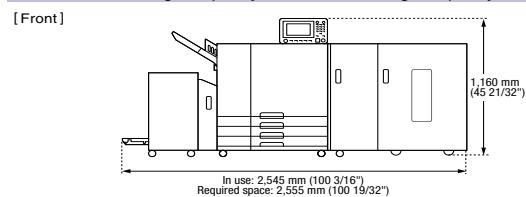


ComColor GL + High Capacity Feeder G10

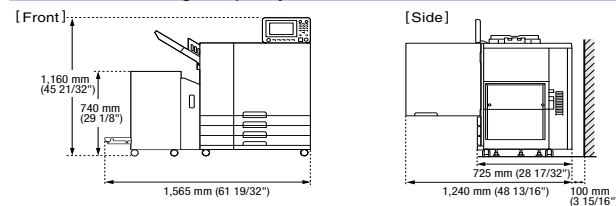

ComColor GL + High Capacity Stacker G10

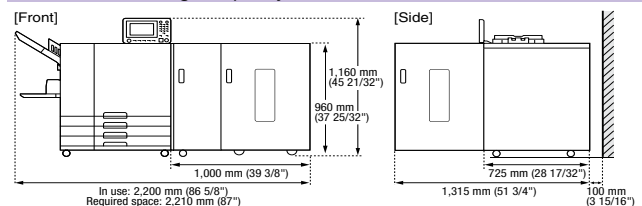


ComColor GL + Scanner HS7000 + Multifunction Finisher FG20 and Folder Unit FG20

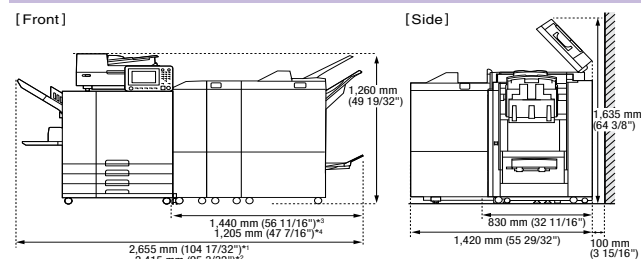


*1 ComColor GL+Multifunction Finisher and Folder Unit *2 ComColor GL+Multifunction Finisher *3 Multifunction Finisher and Folder Unit *4 Multifunction finisher


ComColor GL + Scanner HS7000 + Additional 2000 Sheet Feeder FG20

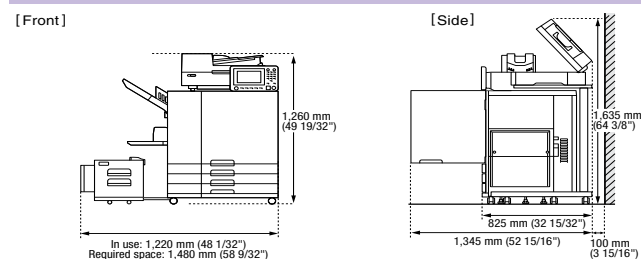


ComColor GL + Perfect Binder G10

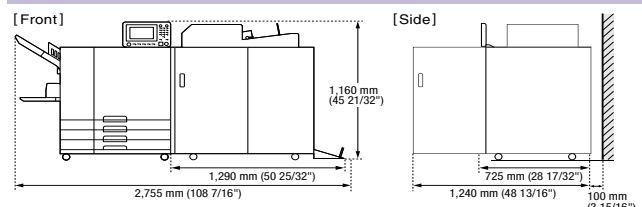

ComColor GL + Scanner HS7000 + Face Down Finisher G10

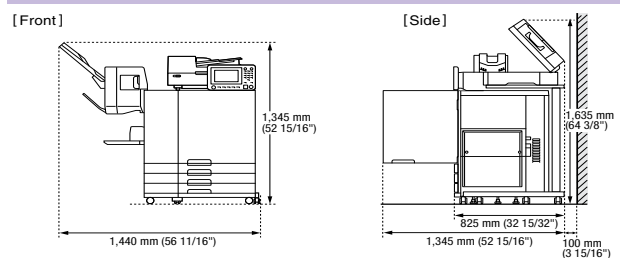

 RISO, and ComColor are trademarks or registered trademarks of RISO KAGAKU CORPORATION. EFI and Fiery are trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the United States and/or certain other countries. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the United States and/or other countries. macOS, AppleTalk and Bonjour are trademarks of Apple Inc. Microsoft, Windows, Excel, PowerPoint, and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Intel and Intel Core are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Other corporate names and/or trademarks are either registered trademarks or trademarks of each company, respectively.



RISO LATIN AMERICA, INC.
13680 NW 5th Street, Suite 100 - Sunrise, FL 33325
<https://www.risolatin.com/>